


Ref.2917 KILO

The Kilo gear carabiner features a proprietary design that makes it particularly robust, stable and easy to use.
 Two-part aluminum alloy body connects with two stainless steel Torx TH20 screws making installation quick and simple.
 Gear parking position at the top.
 Plastic spacer insert for use on webbing up to 45 mm.
 Stainless steel wire gate is shaped for smooth action and maintains a low profile to prevent entanglement and accidental opening.
 Torx TH20 allen wrench included.
 Working load limit: 20 kg. Safety release breaking load: 150 kg.
 Warning: the Kilo must never be used as a safety carabiner.

GENERAL ROPE ACCESS TREE CLIMBING

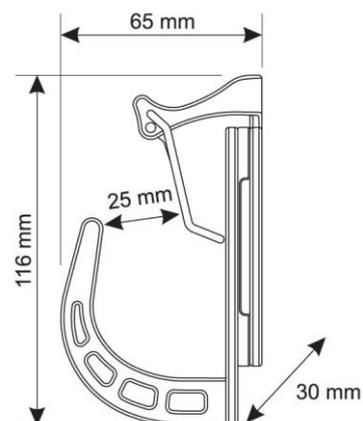

Extreme stability when fixed on the harness thanks to the two screw which allow to compress the 2 parts of the body on the webbing



Holes for connecting tool lanyards



Ref.	Product name Nombre del producto	Weight Peso		G ^{mm}	Strength Resistencia	Working load Max Carga de trabajo Max
		g	oz			
2917	KILO	52	1.9	25	1.5	20