

# 7050101 RETEXO REWIND

CONSTRUCTION TOWERS/INDUSTRY ROPE ACCESS CONFINED

Retexo Rewind lanyards are a cost-effective combination of the premium Retexo shock absorber and compact rewind lanyards. Robust elastic webbing lanyards have a high elongation ratio (1:2.3).

Certified for horizontal use over sharp edges ( $r \geq 0.5$  mm).


The Retexo is a next generation energy absorber designed to be particularly light and compact.

Energy absorption is optimized to limit extension in the event of a fall as much as possible while still achieving a low fall arrest force.


With lanyards with a total length up to 200 cm, the Retexo is certified for workers with a maximum total weight up to 130 kg. Ideal in situations with limited clearance (<4 m) when used with lanyards with a total length up to 150 cm.

Robust case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.

EDGE TESTED




Certified for horizontal use over sharp edges

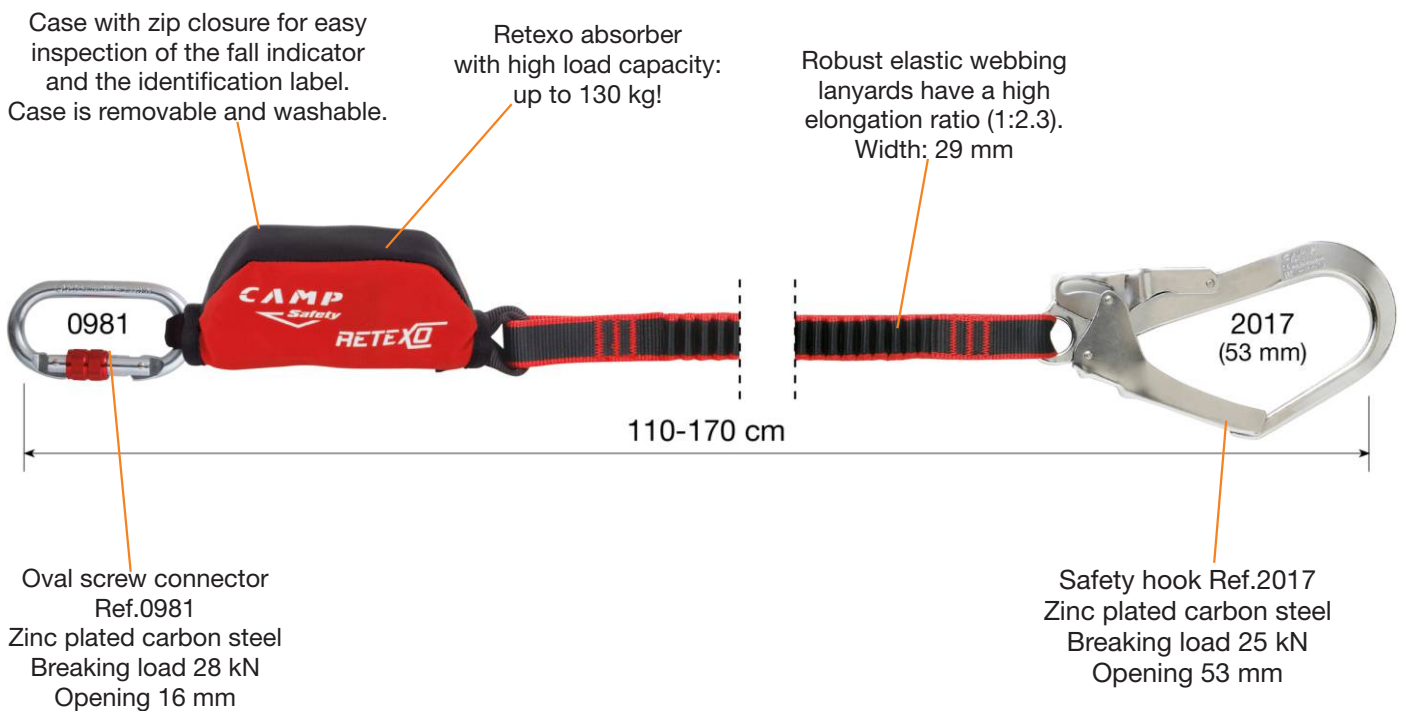

Ref.	Product name Nombre del producto	Weight Peso		Working load Max Carga de trabajo Max	CE	 CNB/P/11.074
		g	oz			
7050101	RETEXO REWIND SINGLE + 0981 + 2017 110-170 cm	980	34.6	130	•	•

# RETEXO ABSORBER

## CE Label

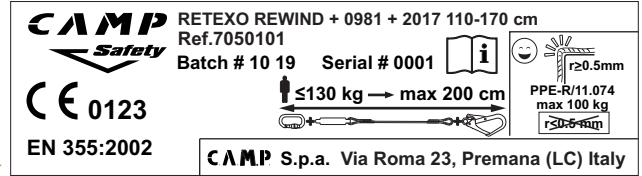

Case with zip closure for easy inspection of the fall indicator and the identification label. Case is removable and washable.




One label with all the information.

## Fall Indicator Label




Retire from service if this label is broken


## RETEXO ABSORBER - Clearance distance

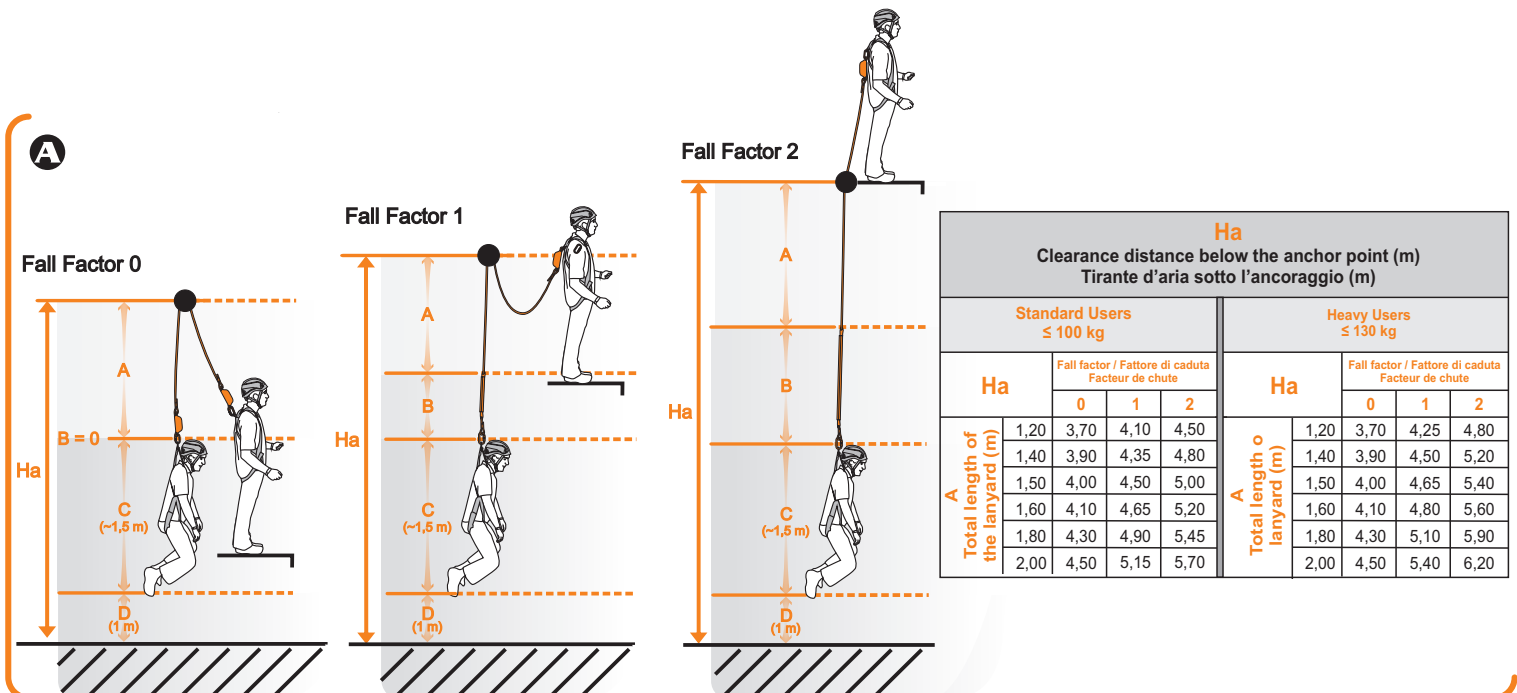

## RETEXO ABSORBER - Clearance distance

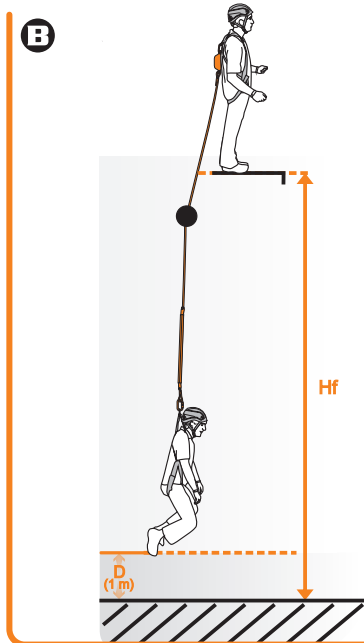

H <sub>f</sub> Clearance distance below the user's feet (m) Tirante d'aria sotto i piedi dell'operatore (m)					
Standard Users ≤ 100 kg			Heavy Users ≤ 130 kg		
H <sub>f</sub>	A Total length of the lanyard (m)	Fall factor / Fattore di caduta / Facteur de chute		H <sub>f</sub>	A Total length of the lanyard (m)
		0	2		
	2,00		6,20		6,70

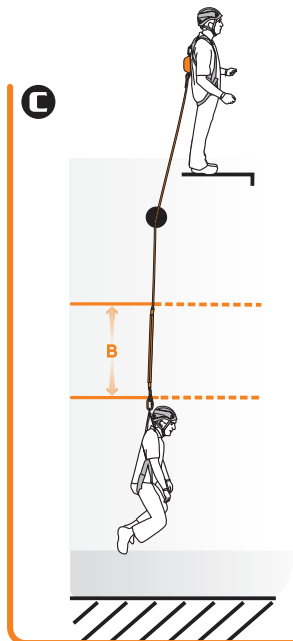

B Extension of the energy absorber (m) Estensione dell'assorbitore di energia (m)									
Standard Users ≤ 100 kg					Heavy Users ≤ 130 kg				
A Total length of the lanyard (m)	B	Fall factor / Fattore di caduta / Facteur de chute			A Total length of the lanyard (m)	B	Fall factor / Fattore di caduta / Facteur de chute		
		0	1	2			0	1	2
		1,20	0				0,40	0,80	1,20
1,40	0,45	0,90		1,40		0,60	1,30		
1,50	0,50	1,00		1,50		0,65	1,40		
1,60	0,55	1,10		1,60		0,70	1,50		
1,80	0,60	1,15		1,80		0,80	1,60		
2,00	0,65	1,20		2,00		0,90	1,70		