

SUPPORT FOR AOS01 ON CORRUGATED SHEET METAL ROOFS

UNOBTRUSIVE


The device ensures a reduced visual impact thanks to its small size.

PACKAGING

Supplied complete with mounting rivets and cellular rubber seals for perfect waterproofing.

DESIGN

Non-invasive system with modern lines, for an excellent aesthetic result.

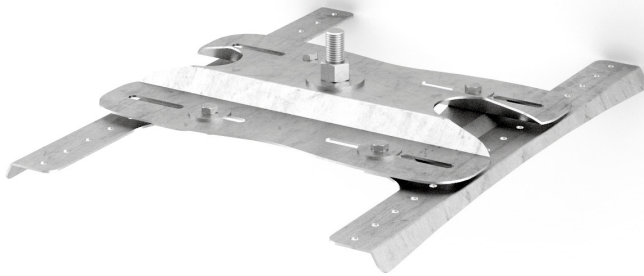

CODES AND DIMENSIONS

CODE	material	B [mm]	L [mm]	pcs.
SHIELD	stainless steel 1.4301 - AISI304	360	476	1

AOS01 anchor point not included in the package, can be ordered separately.
Fasteners are included in the package.


COMPLEMENTARY PRODUCTS

ACCESSORIES

CODE	description	p.
AOS01	swivel eyelet	98

TECHNICAL DATA

LABORATORY STRENGTHS

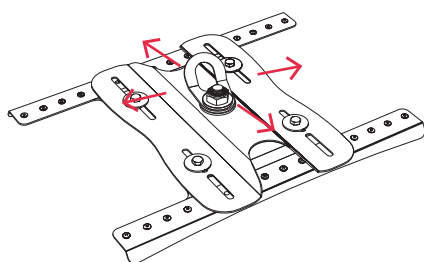

Data	Standard	Value
Q _s	EN 795:2012 - CEN/TS 16415:2013	13 kN
Q _{d2}	EN 795:2012 - CEN/TS 16415:2013	12 kN

SURFACE INCLINATION



FIELD OF USE

- Corrugated sandwich panel / corrugated sheet metal
 - min. steel: 0,4 mm
 - min. aluminium: 0.6 mm